



Universal Grab Handles Instructions and Owners Manual

Fishmaster, Inc.
www.Fishmaster.com
Support@Fishmaster.com

Phone: 877-777-8693
Fax: 877-437-6210

THANK YOU FOR YOUR BUSINESS. IF YOU ARE NOT COMPLETELY SATISFIED IN ANY WAY WITH YOUR NEW GRAB HANDLES, PLEASE CONTACT US. Our entire purpose as a company is to offer great products at affordable prices that our customers love.

Please take a few minutes to read the installation instructions and become familiar with the UNIVERSAL GRAB HANDLES and installation before beginning to ensure a high quality, trouble free installation and use. If you have any questions during your installation give us a call at 877-777-8693 or e-mail Support@Fishmaster.com


IMPORTANT NOTES ON INSTALLING AND USING YOUR NEW UNIVERSAL GRAB HANDLES

- Read entire manual before installation.
- Only for use with 1.90 Outside Diameter Tubing or Pipe.
- Check bolts and ensure they are tight at all times.
- Use safety goggles when drilling into the aluminum tubing to prevent shaving from getting into your eyes.

Fishmaster, Inc Warranty

Fishmaster warrants this product against manufactures defects for a period of five (5) years. Anodized surfaces are specifically excluded, as their care and use cannot be controlled by the manufacturer. Any modifications or improper use, not approved in writing by Fishmaster shall void this warranty. Fishmaster is not responsible for personal injury or damage to the boat caused by the use of this product. Fishmaster's obligation under this warranty shall not include any transportation charges or costs of installation or any liability for direct, indirect or consequential damages resulting from delay or improper installation. Fishing is a lot more fun than reading legal fine print. If you need to make a warranty claim contact Fishmaster at 877-777-Tower to receive a return authorization number which is required for all claims. Defects must be reported within 30 days of discovery.

Fishmaster Universal Grab Handles

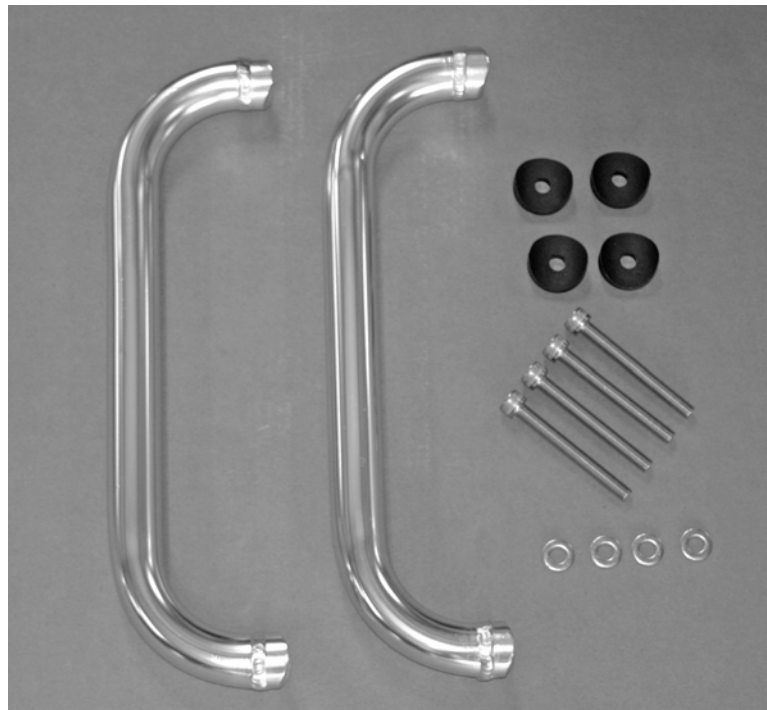

Item	Description
Grab Handles	2 Universal Grab Handles
4 Delrin Spacers	Provides contoured fit to side upright
4 Bolts	Secures the handle to the side upright
4 Washers	Goes between bolt head and Delrin spacer

INSTALLATION

1. Determine where on the T-Top side upright that you would like to attach the grab handle. The handle can be installed anywhere on the T-Top uprights or top section that will not prevent the T-Top from folding.



2. Measure 14 1/2" (distance between top and bottom bolt holes on handle) and mark on tubing where to drill.



3. Drill holes in t-top side upright using a 1/2" drill bit. Make sure that the holes are drilled straight. It is okay if you need to make the hole a bit larger to make the handle seat properly against the tubing. The end of the handle and the Delrin Spacer will cover the drilled holes giving it a clean appearance.



4. Put a washer on a bolt and thread it through the Delrin Spacer. Next, insert this bolt through the holes that you just drilled on the t-top side upright. Line up the bolt hole on the grab handle.



5. Tighten down firmly with Allen wrench. Use the drill bit to expand the hole for clearance of the bolt.

6. Do same installation on opposite t-top side upright.



Please send us a picture of your installed grab bar with your shirt size and we will send you a Fishmaster Fishing Team T-shirt. Send to: Sales@Fishmaster.com